

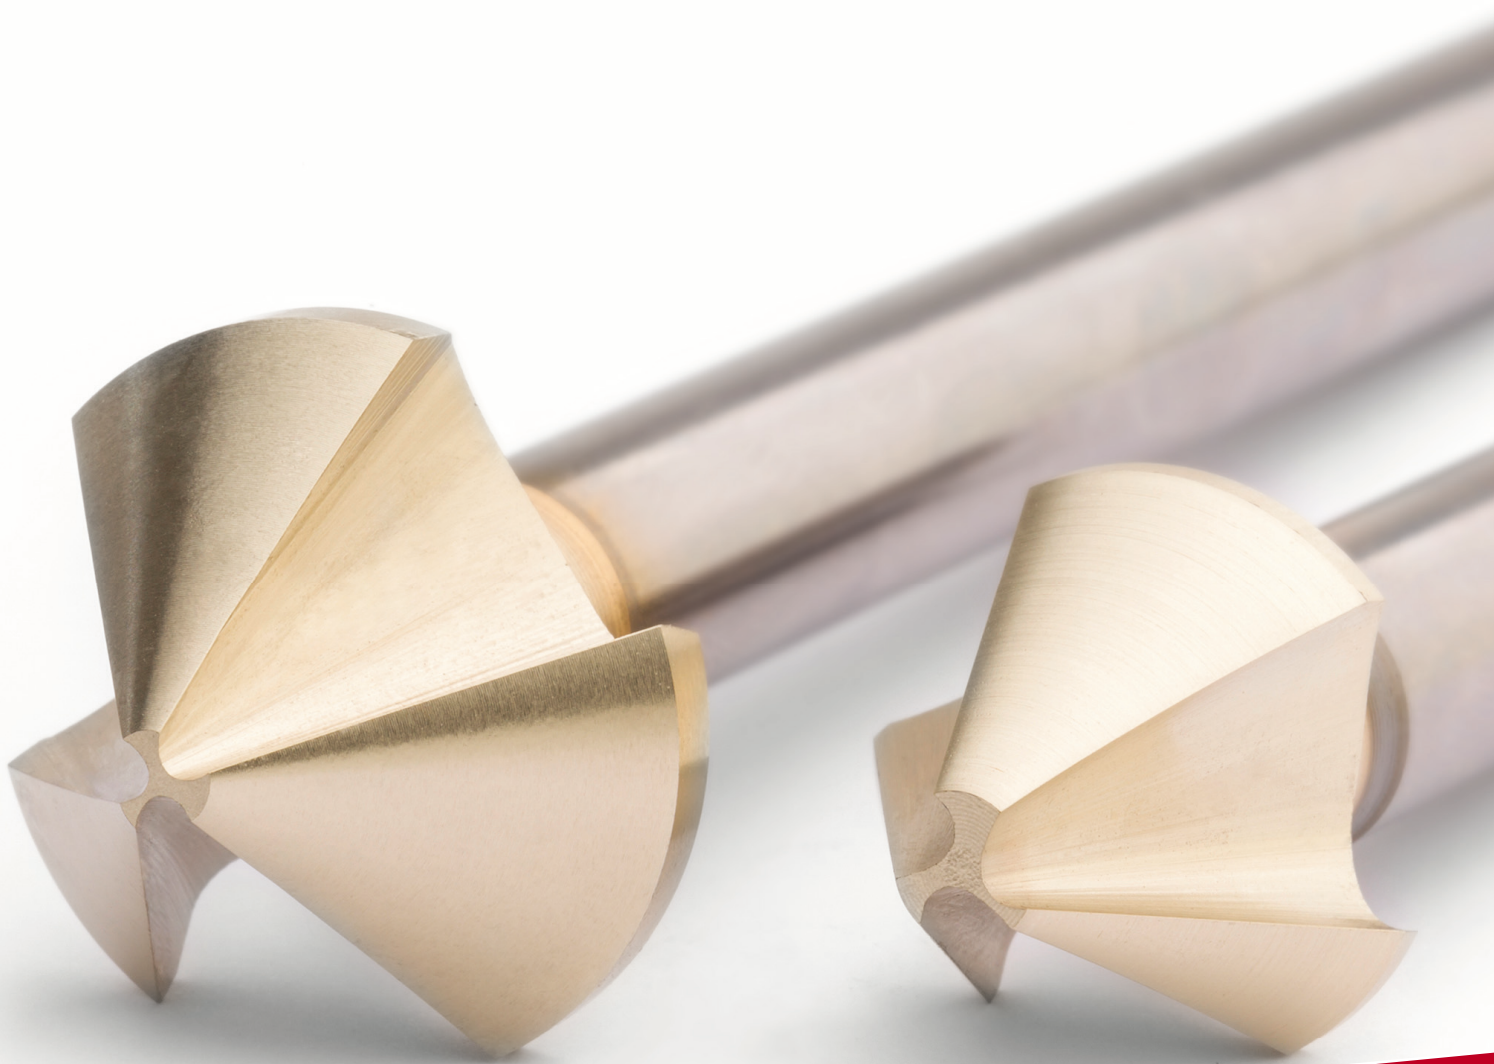
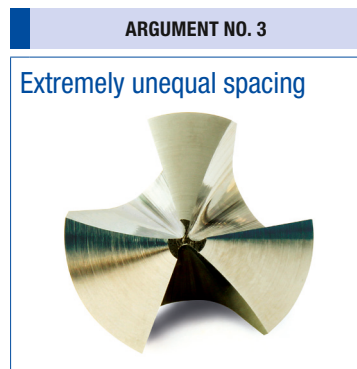


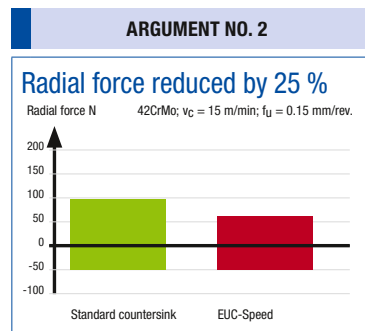

Now also in 60° and
longer 90° version

Standard programme – Countersinking tools
EUC-Speed

EUC-Speed - The revolution in countersinking

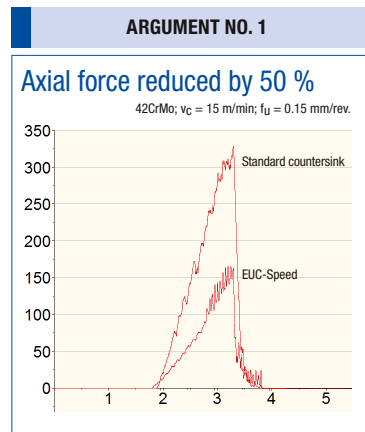


Our arguments make the difference!
Special coating,
prepared cutting edges,
revolutionary geometry ...

Countersink 90° | EUC-Speed

Precision version, extremely unequal spacing, right hand cutting, radially relieved

054209 HSS + Special coating, with extended cylindrical shank (Tol. h9)

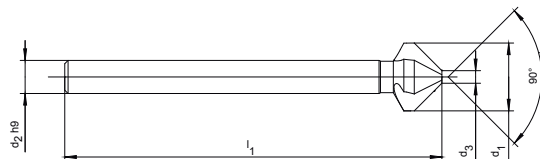


Dimensions				z	Order-No.
d_1	$d_2 \text{ h9}$	d_3	l_1		
6,30	5,00	1,50	104	3	31006152
8,30	6,00	2,00	105	3	31006153
10,40	6,00	2,50	107	3	31006154
12,40	8,00	2,80	108	3	31006155
16,50	10,00	3,20	111	3	31006156
20,50	10,00	3,50	114	3	31006157
25,00	10,00	3,80	118	3	31006158
31,00	12,00	4,20	140	3	31006159

Countersink 60° | EUC-Speed

Precision version, extremely unequal spacing, right hand cutting, radially relieved

054110 HSS + Special coating, with cylindrical shank (Tol. h9)
054107 HSS + Special coating, with 3 clamping surfaces on the shank



Dimensions				z	Order-No.	
d_1	$d_2 \text{ h9}$	d_3	l_1		054110	054107
6,30	5,00	1,60	45	3	31051748	31051765
8,00	6,00	2,00	50	3	31051749	31051766
10,00	6,00	2,50	50	3	31051760	31051767
12,50	8,00	3,20	56	3	31051761	31051768
16,00	10,00	4,00	63	3	31051762	31051769
20,00	10,00	5,00	67	3	31051763	31051770
25,00	10,00	6,30	71	3	31051764	31051771